


Saving space with ultra-narrow and ultra-thin structure

- Ultra narrow bezel of 6mm, up to 97% screen-to-body ratio.
- Ultra narrow distance from screen to border of 36mm, reducing redundancy in physical structure.
- Ultra slim screen depth of 20mm, saving conference room space but having beautiful appearance.
- Overall appearance of black, high-end and low-profile.




Exclusive UI system, particular and outstanding

- Unique black gold UI with three-dimensional icons.
- Various & customized icons.
- Free & convenient APPs adding.

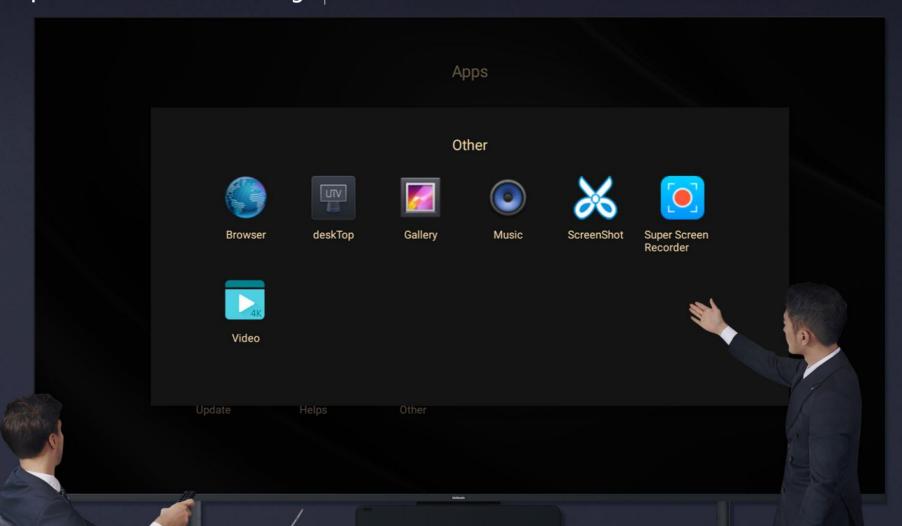

One-click screen projection, supporting simultaneous split screen operation of 4 windows

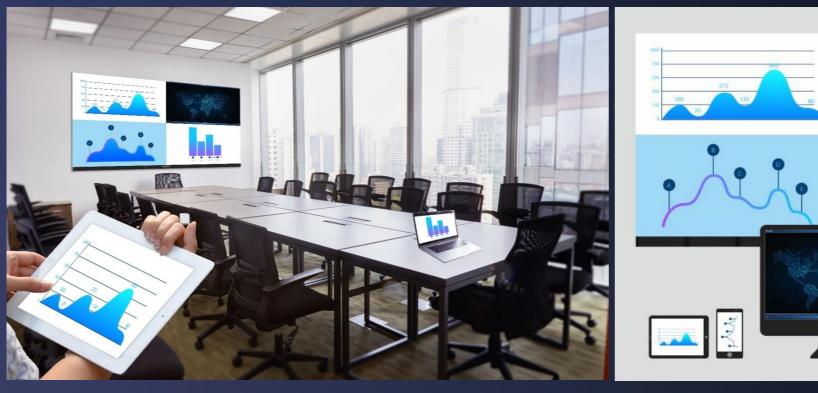



- The transmission resolution is 1920*1080, and whether it is PPT, picture or video, it can be displayed on the screen in high definition.
- It is suitable for screen projection of various terminals, convenient for data transmission of mobile terminals such as tablet, mobile phone and laptop.
- Up to 4 windows can be displayed simultaneously.



Efficient communication in teleconferencing

- 108 inches/135 inches/162 inches large screens, 2K display resolution, high-definition display.
- Support a variety of accessing methods, conference ID, link or dial-up, etc., safe and convenient.
- Compatible with mainstream video conferencing software.

Integrated solution, convenient and considerate

- Satisfy the needs of different conference scenarios.
- Convenient to control by the all-in-one machine.
- User-friendly configuration of touchable E-board, gooseneck microphone and intelligent pen.




Personalized DIY background, enjoy exclusive background



- Supporting different inserting or editing according to different needs.
- User-friendly designed welcome wall.

User-friendly operation design, ready to use

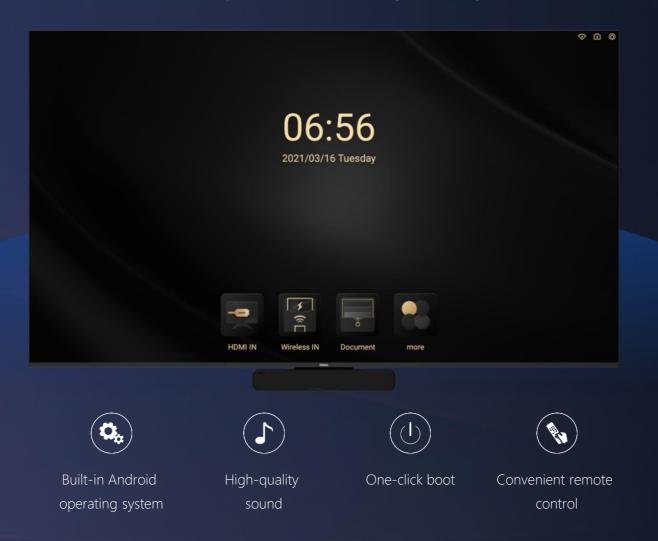






Convenient installation, worry-free and time-saving

- User-friendly design.
- Reduction of on-site operation procedures by the design of segmented assembled structural units.
- No need to level and calibrate joints between segmented unit structures because of the high-precision die-cast aluminum cabinet.
- Meet the use requirements of different environments by wall-mounted or mobile bracket installation.



OPS-like independent master control

- The master control is an external fixing method, similar to OPS chassis, easy for commercial operation.
- Convenient to assemble and disassemble than the traditional built-in frame.
- The modular structure is in universal use for all-in-one screens of different sizes.

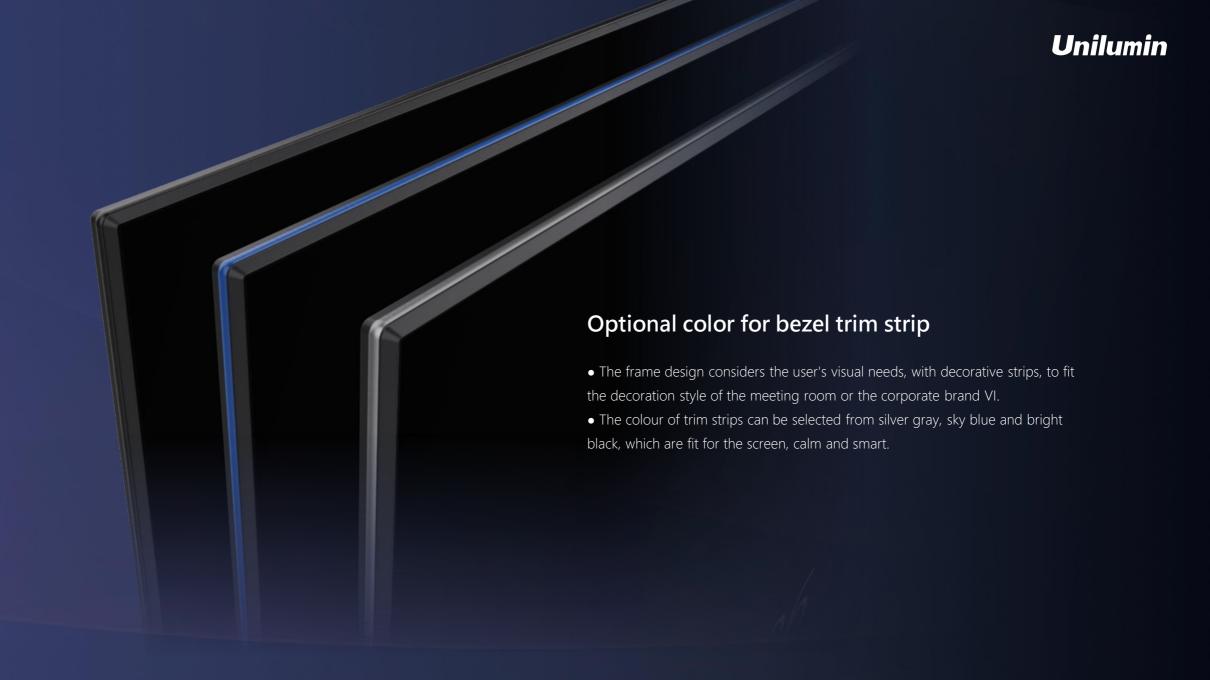



Basic Parameters

Product Model	T1-108	T1-135	T1-162
Display Size (inch)	108	135	162
Screen Resolution(W×H) (dot)	1920×1080	1920×1080	1920×1080
Contrast	5000:1	5000:1	5000:1
White balance brightness(cd/m²)	400 (adjustable)	400 (adjustable)	400 (adjustable)
Refresh Rate (Hz)	3840	3840	3840
Viewing Angle (horizontal/vertical)	160°/160°	160°/160°	160°/160°
Screen Size (W/H) (mm)	2412×1407	3012×1744.5	3612×2082
Weight (Kg)	88	138	192
Maximum Power Consumption (W/screen)	1600	1500	1800
Interface Type	HDMI IN x1/ HDMI OUT x1 / Digital Optical Fiber /HDMI ARC		
Installation Method	Wall Hanging, Mobile Bracket	Wall Hanging, Mobile Bracket	Wall Hanging, Mobile Bracket
Packaging process	Wooden Box + Carton + Foam	Wooden Box + Carton + Foam	Wooden Box + Carton + Foam
Certification	UL/CE	UL/CE	UL/CE

Applications









Make smart meetings at your fingertips

Thank You for Your Listening!

